

FREQUENCY (HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION VALUES	Without Mineral Wool	0,33	0,44	0,43	0,50	0,56	0,56	0,62	0,62	0,57	0,51	0,47	0,49	0,49	0,49	0,49	0,48	0,50	0,53
	With Mineral Wool	0,55	0,55	0,51	0,53	0,55	0,57	0,61	0,60	0,59	0,55	0,51	0,50	0,50	0,50	0,49	0,48	0,51	0,53


GENERAL FEATURES

Materials	MDF Standart D-s2.d0 MDF FR B-s2.d0 Plasmen Fabric
Thickness (mm)	18mm
Weight (Approximately)	9,50 kg/m ² 18mm Standart MDF 11,50 kg/m ² 18mm Fire Resistant MDF
Application	French Cleat

ACOUSTIC VALUES

Mounting Depth 200mm	NRC	Euro Class
Without Mineral Wool	0,55	D
With Mineral Wool	0,55	D
Mineral Wool	50 mm	50 kg/m ³

Absorption according to EN ISO 354

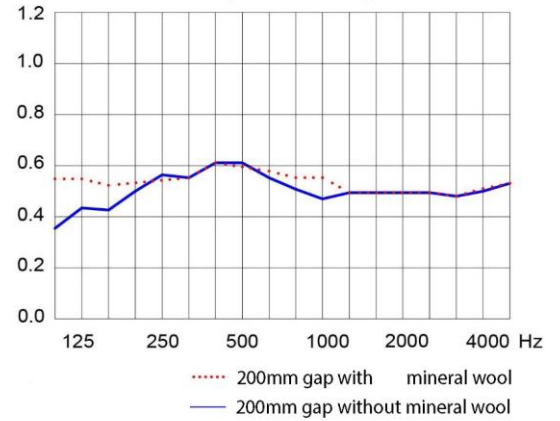

Sizes

Standart MDF	Fire Resistant MDF
600X600	600x600
600X900	600x1200
600X1200	600x2400
600X1800	