



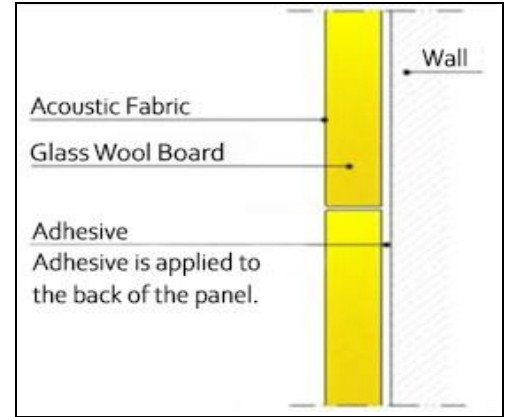

FREQUENCY (HZ)	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION VALUES	0,16	0,31	0,48	0,61	0,79	0,84	0,90	0,97	0,96	0,98	0,99	0,97	1,01	1,02	1,01	1,04	1,03	1,04

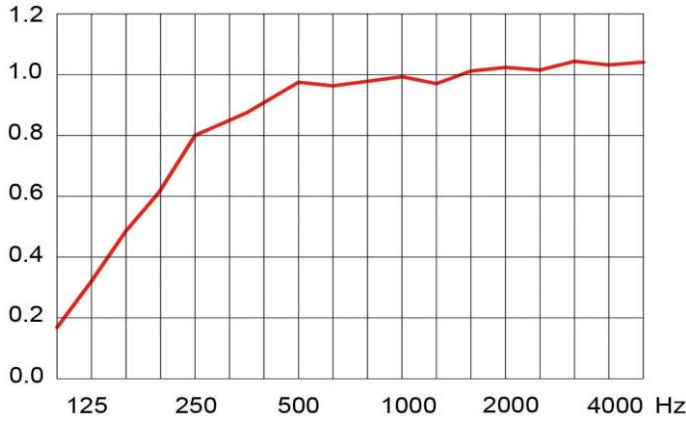

#### GENERAL FEATURES

- Core Material:** 95 kg/m<sup>3</sup> density acoustic glass wool.
- Thickness:** 40 mm
- Size:** 600x600 600x1200 600x1800 600x2400 600x3000  
1200x1200 1200x1800 1200x2400 1200x3000
- Edge Detail:** Flat and strenghtened.
- Fire Resistance:** A2 s1 d0 class according to TSE EN 13501-1+A1:2013 standarts.
- Moisture Resistance:** Resistant to 95% density at 30°C temperature according to ISO\_4611.
- Acoustic Performance:** **NRC:** 0,95
- Application:** Adhesive (Adhesive is applied to the back surface of the panel)