
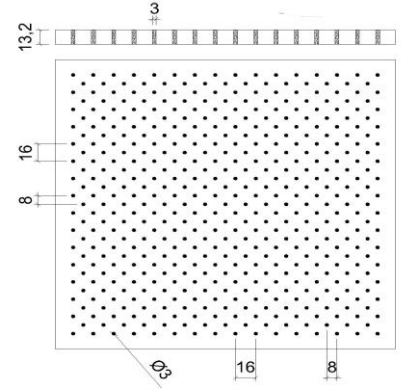


**PRODUCT DEFINITION:**

Fire retardant acoustic panel with holes on viewed face and at back side. Soundtex black glass tissue applied to back face. Various color options available on all visible surfaces. Used for interior applicants in general building and civil engineering structures.

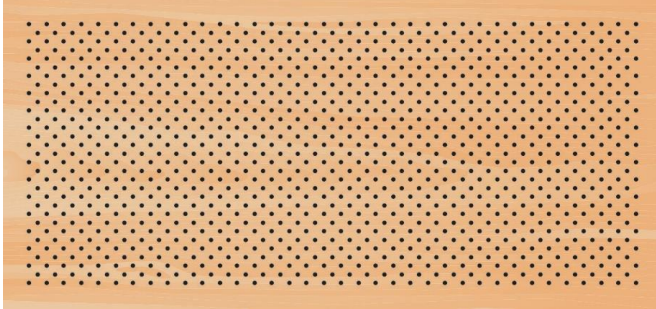

FREQUENCY(HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
<b>SOUND ABSORPTION COEFFICIENT</b>	<b>With Mineral Wool</b>	0,28	0,42	0,43	0,45	0,44	0,46	0,46	0,46	0,46	0,42	0,40	0,38	0,30	0,28	0,24	0,20	0,19	0,22


**ACOUSTIC FEATURES:**

Diameter Of Hole (mm) 3  
Pitch Of Hole (mm) 16x8  
Depth Of Hole (mm) 13,2  
Perforated Area (%) 6

**ACOUSTIC VALUES**

**Mounting Depth 200mm** **NRC** **Euro Class**  
With Mineal Wool 0,40 D  
Mineral Wool 30 mm 30 kg/m3

Absorption according to EN ISO 354

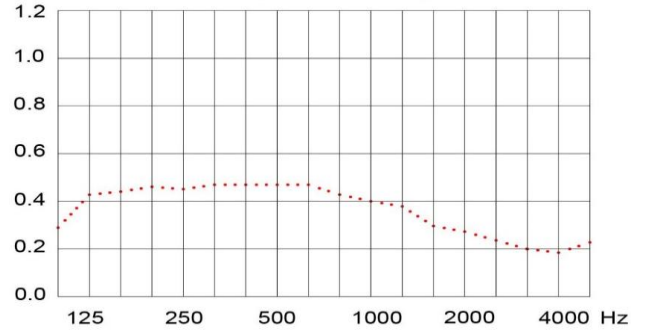

..... 200mm gap with mineral wool

**GENERAL FEATURES:**

Materials 12,5 mm Fiber Gypsum Board  
Reaction To Fire A2-s1,d0 Fiber Gypsum Board B-s1,d0 Veneered  
Total Thickness (mm) 13,2 mm  
Approximate Weight 15,75 kg/m2  
Finishing Wood Veneered High Pressure Laminate (HPL) Varnished  
Lacquered to RAL Chart  
Installation Aluminium profile  
Edges Solid wood edge banded, grooved

**Sizes**

