
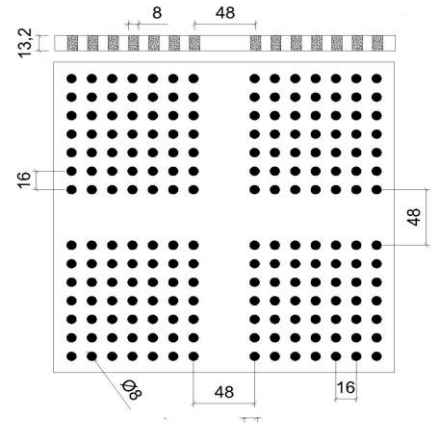


PRODUCT DEFINITION:

Fire retardant acoustic panel with holes on wieved face and at back side. Soundtex black glass tissue applied to back face. Various color options available on all visible surfaces. Used for interior applicants in general building and civil engineering structures.

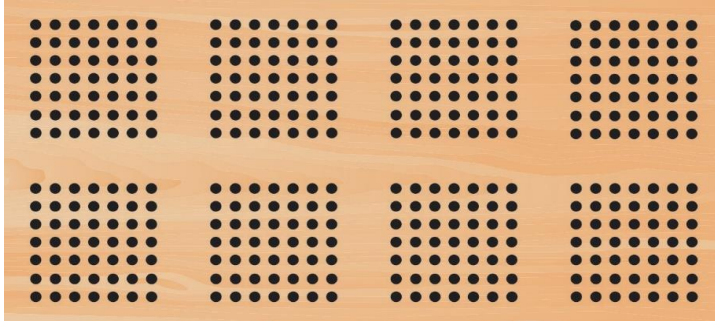

FREQUENCY(HZ)	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION COEFFICIENT	0,30	0,46	0,46	0,53	0,55	0,55	0,54	0,53	0,49	0,43	0,41	0,39	0,31	0,27	0,24	0,23	0,30	0,36

ACOUSTIC FEATURES:


Diameter Of Hole (mm)	8
Pitch Of Hole (mm)	16x16
Depth Of Hole (mm)	13,2
Perforated Area (%)	8

ACOUSTIC VALUES

NRC	Euro Class
With Mineral Wool	0,45 D

Mineral Wool	30 mm	30 kg/m3
--------------	-------	----------

Absorption according to EN ISO 354

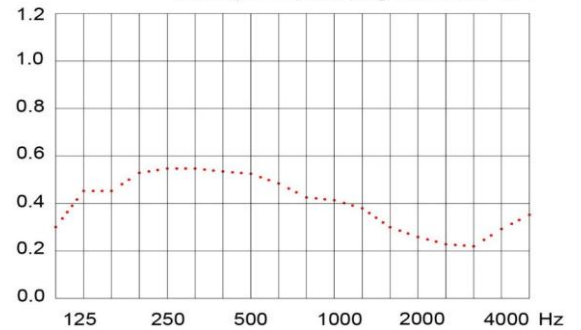

..... 200mm gap with mineral wool

GENERAL FEATURES:

Materials	Fiber Gypsum Board
Reaction To Fire	A2-s1,d0 Fiber Gypsum Board B-s1,d0 Veneered
Thickness (mm)	13,2 mm
Approximate Weight	15,75 kg/m2 12,5mm fiber plaster
Finishing	Wood Veneered High Pressure Laminate (HPL) Varnished Lacquered to RAL Chart

Sizes

1200				
800				
600				
400				
300				
	600	800	1200	2400

Installation

Aluminium profiles gripping the full length of the sides of the panels.

Edges

Solid wooden edges at 4 side, grooved to use aluminium profiles