
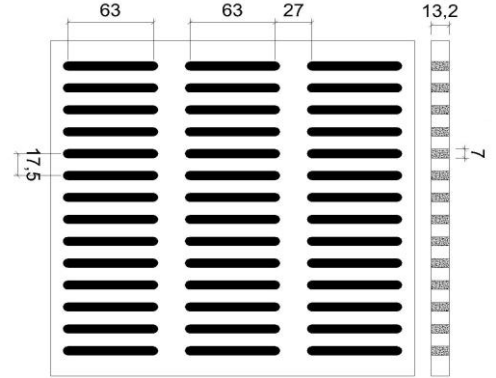


PRODUCT DEFINITION:

Fire retardant acoustic panel with slots on viewed face. Soundtex black glass tissue applied to back face. Various color options available on all visible surfaces. Used for interior applicants in general building and civil engineering structures.

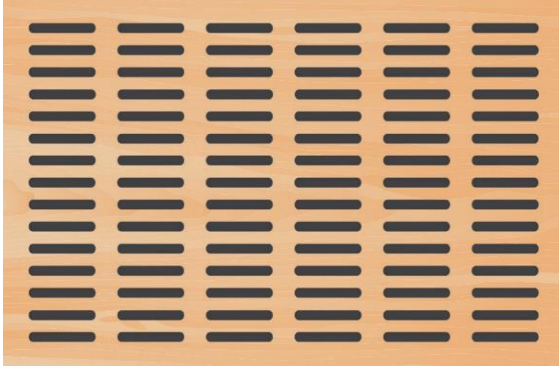

FREQUENCY(HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION COEFFICIENT	With Mineral Wool	0,35	0,46	0,47	0,75	0,85	0,91	0,87	0,91	0,88	0,78	0,77	0,81	0,77	0,74	0,68	0,65	0,64	0,65


ACOUSTIC FEATURES:

Lenght Of Slot (mm)	63
Diameter Of Slot (mm)	7
Depth Of Slot (mm)	13,2
Pitch Of Slot (mm)	17,5x27
Perforated Area (%)	28

ACOUSTIC VALUES

Mounting Depth 200mm	NRC	Euro Class
With Mineral Wool	0,80	B
Mineral Wool	30 mm	30 kg/m3

Absorption according to EN ISO 354

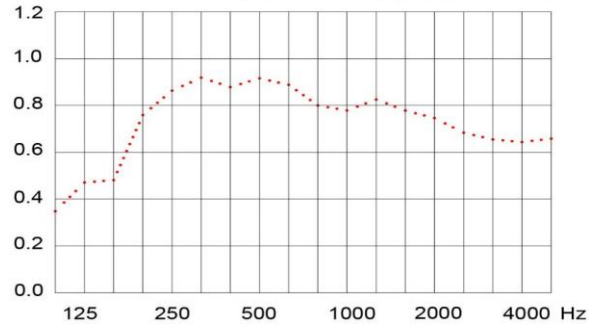

..... 200mm gap with mineral wool

GENERAL FEATURES:

Materials	12,5 mm Fiber Gypsum Board
Reaction To Fire	A2-s1,d0 Fiber Gypsum Board B-s1,d0 Veneered
Total Thickness (mm)	13,2 mm
Approximate Weight	15,75 kg/m2
Finishing	Wood Veneered High Pressure Laminate (HPL) Varnished Lacquered to RAL Chart
Installation	Aluminium profile
Edges	Solid wood edge banded, grooved

Sizes

