


PRODUCT DEFINITION:

Acoustic panel with grooves on wieved face and holes at back side. Soundtex black glass tissue applied to back face. Various color options available on all visible surfaces. Used for interior applicants in general building and civil engineering structures.

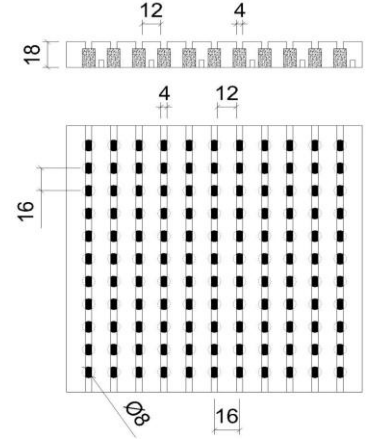

FREQUENCY(HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION COEFFICIENT	With Mineral Wool	0,34	0,51	0,50	0,79	0,83	0,93	0,91	0,94	0,90	0,80	0,79	0,84	0,79	0,78	0,74	0,72	0,71	0,74


ACOUSTIC FEATURES:

Distance Between Grooves (mm)	12
Width Of Groove (mm)	4
Depth Of Groove (mm)	6
Diameter Of Hole (mm)	8
Pitch Of Hole (mm)	16x16
Depth Of Hole (mm)	15
Perforated Area (%)	16

ACOUSTIC VALUES

Mounting Depth 200mm	NRC	Euro Class
With Mineral Wool	0,85	B
Mineral Wool	30 mm	30 kg/m3

Absorption according to EN ISO 354

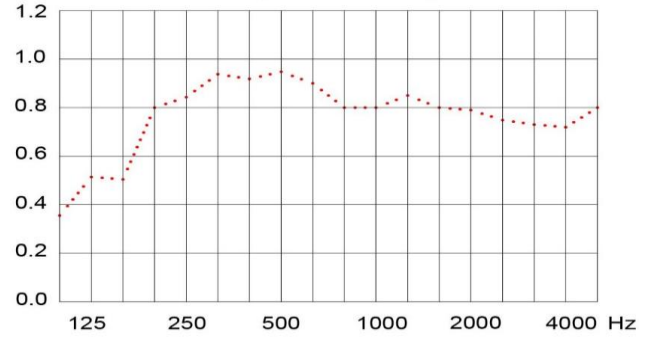

..... 200mm gap with mineral wool

GENERAL FEATURES:

Materials	MDF Standart D-s2.d0 MDF Fire Resistant B-s2.d0
Thickness (mm)	18mm (MDF) For other materials and thicknesses, please contact with PERFOPAN
Approximate Weight	13,45 kg/m2 18mm Standart MDF 14,60 kg/m2 18mm Fire Resistant MDF
Finishing	Melamine Wood Veneered High Pressure Laminate (HPL) Varnished Lacquered to RAL Chart

Sizes

	Tongued & Grooved	FR Class	D Class
Melamine		128 x 2780	128x2780
		192 x 2780	128x3640
			192x2780
			192x3640
HPL		128 x 2780	128x2780
		192 x 2780	128x3640
			192x2780
			192x3640
Veneered		128 x 2780	128 x 2780
		192 x 2780	192 x 2780
Lacquered		128 x 2780	128x2780
		192 x 2780	128x3640
			192x2780
			192x3640